



Affidavit of Compliance with Radio Frequency Regulations and Radiation Safety Regulations

State of California


County of Shasta

I, David C. Cotton, Jr. (MA PE#48721), being duly sworn, depose and state as follows:

I am a licensed radio frequency engineer with expertise in wireless communications systems.

I have thoroughly examined and evaluated the wireless communications equipment installed at the addresses in the attached table and reviewed the attached RF Emission Compliance Report dated October 12, 2022 for Site TMO_Omni Config -01_1 Boston, which is associated with the sites below.

Based on my professional knowledge and assessment, I certify that the wireless communications equipment, as installed and operated, will not cause interference to any lawfully operated emergency communications system, television, telephone, or radio in the surrounding area. I affirm that the installation and operation of the aforementioned equipment adhere to all relevant regulations and standards set forth by the Federal Communications Commission (FCC) and the Massachusetts Department of Public Health and Safety.

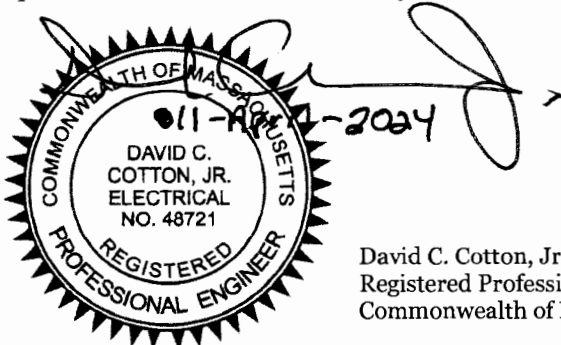

David C. Cotton, Jr.
Registered Professional Engineer
Commonwealth of Massachusetts, 48721

State of California

County of Shasta

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

Sworn to and subscribed before me this 11th day of 4, 2024.

H. L. Waldren

[Signature of Notary Public]

JURAT

State of California

County of Shasta


Subscribed and sworn to (or affirmed) before me on
This 11th day of April, 2024

By David Cotton
Personally known to me or proved to me on the basis of
satisfactory evidence to be the person(s) who appeared
before me.

Signature H. L. Waldren

H. L. Waldren
[Printed Name of Notary Public]

My commission expires: 01/27/2027



The pathway to possible.
CrownCastle.com

Crown ID	Pole Type	Latitude	Longitude	Location	Nearest abutting property addresses
ODAS_2f-22	Wood	42.427091	-71.060592	Not in ROW	290 EASTERN AV
ODAS_2f-29	Wood	42.418433	-71.0649	Not in ROW	14 16 GREENWOOD CT
ODAS_2f-30	Wood	42.415163	-71.068198	ROW	101 BELL ROCK ST
ODAS_2f-26	Wood	42.423182	-71.06748	ROW	244 248 MAIN ST
ODAS_2f-27	Wood	42.430236	-71.06735	ROW	621 MAIN ST
ODAS_2f-25	Wood	42.42884	-71.071069	ROW	48 WASHINGTON ST



WATERFORD

RF EMISSIONS COMPLIANCE REPORT

Prepared for:

Crown Castle
67 Sharp St
Hingham, MA 02043

Site:

TMO_Omni Config-01_1
Boston

October 12, 2022

This site will be in compliance with

FCC Regulations and MPE Limits:

**Crown Castle Is 4.661% of General Population (GP) Limit
(0.932% of Occupational (Occ) Limit)**

Analysis completed using Waterford's NIERTool© software

Only clients and client representatives are authorized to provide input data through the Waterford web portal. In securing that authorization, clients and client representatives warrant the accuracy of all input data. Waterford Consultants, LLC attests to the accuracy of the engineering calculations. Waterford also attests that the results of those engineering calculations are correctly summarized in this report.

©Copyright 2005-2022 Waterford Consultants, LLC.

All rights reserved

7430 New Technology Way, Suite 150

Frederick, Maryland 21703

(703) 596-1022 Phone

www.waterfordconsultants.com

RF EMISSIONS COMPLIANCE STATEMENT

Site:
TMO_Omni Config-01_1
Boston

Compliance Statement

Subject site COMPLIES with Radiofrequency Radiation Exposure Limits of 47 C.F.R. §§ 1.1307(b)(3) and 1.1310.

Ground Level Site Summary

Predicted cumulative RF power density at ground level as a percentage of the FCC General Population limits. This result is the sum of the maximum ground level MPE for each RF emitter by band of operation. Sites below 100% are in full compliance.

Source	Predicted Power Density, % of Limit (GP)
T-Mobile 1900 MHz	1.751 %
T-Mobile 2100 MHz	0.658 %
T-Mobile 2500 MHz	1.740 %
Verizon 1900 MHz	0.292 %
Verizon 2100 MHz	0.219 %
Sum of Listed Sources	4.661%

Antenna Level Site Summary

Predicted cumulative RF power density at elevated levels near the antenna(s) has been evaluated with respect to the FCC General Population limits. The mitigation measures recommended herein are necessary to achieve and maintain compliance at the site based on the following assessment:

Antenna Level Assessment

Signage directives for this report are specified in the Elevation Detail Plot which depicts predicted RF power density near the antenna as a percentage of the FCC General Population limits. Areas exceeding 100% of the General Population limits are depicted as blue. Any work required within areas exceeding 100% of the limits should be coordinated with wireless operators or performed by personnel trained in RF safety and equipped with personal protection equipment. Workers in areas depicted as green or clear will not be exposed to hazardous levels of RF energy and no action is required to maintain a safe working environment.

As shown in the Elevation Detail Plot, the following keep-back distances to the FCC limits have been determined:

Reference Level	Maximum Level: General Population (%)	Maximum Level: Occupational (%)
Ground Level	4.661	0.932
Antenna Level	1207.510	241.502

Distance to FCC 100% MPE Limits at Antenna Level

- Vertical Stand Off Distance (General Population) 5 feet
- Vertical Stand Off Distance (Occupational) 3 feet
- Horizontal Stand Off Distance (General Population) 12 feet
- Horizontal Stand Off Distance (Occupational) 4 feet


Distance to FCC 100% MPE Limits at Ground Level

- Horizontal Stand Off Distance (General Population) N/A
- Horizontal Stand Off Distance (Occupational) N/A

.

RF Alerting Signage

The "Notice" sign must be posted near the bottom of the pole or on the shroud any time there is a zone near the antenna that exceeds the General Population limit. This sign should be mounted where it is easily visible to workers on the ground as they approach the pole. Suggested locations include on the pole about 8-10' from the ground or on the front of the equipment shroud if it is mounted on the pole.

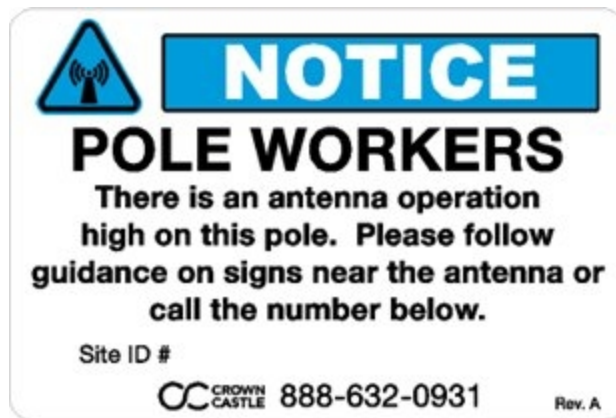

The "Caution" sign must be posted on the antenna any time there is an area that exceeds the FCC General Public exposure limit. The keep-back distance for the General Population limit must be filled in on the sign as depicted below. This sign must be mounted on or just below the radiating antenna so that it is maximally visible to workers approaching the antenna in a lift or bucket truck. If there is more than one radiating antenna and they are less than 5' apart then the sign should be mounted on or near the lower antenna. If there are multiple radiating antennas and they are >5' apart then separate signs should be mounted on or near each antenna.



Technical Framework: Basis for Compliance Statement

The compliance framework is derived from the Federal Communications Commission (FCC) Rules and Regulations for preventing human exposure in excess of the applicable Maximum Permissible Exposure (“MPE”) limits listed in Table 1 of 47 C.F.R. § 1.1310. Calculations using input data provided to Waterford by client or client's representative numerically confirm the subject site can operate at a 100% duty cycle without exceeding the FCC MPE limits in areas of uncontrolled access.

At this site, the radio frequency (RF) power density resulting from each transmitter at any location may be expressed as a percentage of the frequency-specific limits and added to determine if 100% of the exposure limit has been exceeded. The FCC Rules define two tiers of permissible exposure differentiated by the situation in which the exposure takes place and/or the status of the individuals who are subject to exposure. General Population / Uncontrolled exposure limits apply to those situations in which persons may not be aware of the presence of electromagnetic energy, where exposure is not employment related, or where persons cannot exercise control over their exposure. Occupational / Controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment, have been made fully aware of the potential for exposure, and can exercise control over their exposure. Based on the criteria for these classifications, continuous exposure to RF power density levels below the FCC General Population limits is not hazardous. The FCC General Population limits are 5 times more restrictive than the Occupational limits.

Frequency (MHz)	<i>Limits for General Population/ Uncontrolled Exposure</i>		<i>Limits for Occupational/ Controlled Exposure</i>	
	Power Density (mW/cm ²)	Averaging Time (minutes)	Power Density (mW/cm ²)	Averaging Time (minutes)
30-300	0.2	30	1	6
300-1500	f/1500	30	f/300	6
1500-100,000	1.0	30	5.0	6

In situations where the predicted MPE exceeds the General Population threshold in an accessible area because of emissions from multiple transmitters, FCC licensees that contribute greater than 5% of the aggregate MPE share responsibility for mitigation.

For any location where radiofrequency (RF) power densities exceed 100% MPE of the General Population limits, access controls with appropriate RF alerting signage must be available to be visible upon approach from any direction to provide notification of potential conditions within these areas. Subject to other site security requirements, occupational personnel should be trained in RF safety and equipped with personal protective equipment (e.g. RF personal monitor) designed for safe work in the vicinity of RF emitters. Waterford Consultants, LLC recommends that any work activity in these designated areas or in front of any transmitting antennas be coordinated with the wireless operators.

Predictive Modeling

Based on the computational guidelines set forth in FCC Office of Engineering and Technology, Bulletin 65 ("OET65"), Waterford Consultants, LLC has developed software to predict the overall MPE possible at any particular location given the spatial orientation and operating parameters of multiple RF sources. These theoretical results represent worst-case predictions as emitters are assumed to be operating at 100% duty cycle.

The tabular analysis in this report calculates the spatial peak power density produced at ground level from each RF emitter. The far field power density in milliWatts per square centimeter is expressed as $S_{ff} = 33.4 \times ERP / R^2$ where ERP is the Effective Radiated Power along a specific azimuth in Watts and R is the distance from the antenna radiation center in meters. The antenna manufacturer's horizontal and vertical radiation patterns have been considered in determining the ERP in any direction. This computation is based on the maximum ERP and includes a 1.6-fold increase in field strength due to ground reflection. The result provides a conservative estimate of spatially averaged power density at ground level and may be higher than predicted MPE in the graphical plots described below.

As the limits are frequency dependent, the contribution of any RF source at a specific location may be expressed as a percentage of the FCC General Population MPE limits at the associated operating frequency. The percentage contributions from all RF sources are added to determine the overall exposure level. If this result is less than 100%, the predicted cumulative exposure level is below the General Population limits set forth in the FCC Rules. The cumulative MPE depicted on the summary page is the summation of maximum MPE values for each emitter regardless of antenna orientation.

A graphical plot of calculated spatially averaged RF power density, based on the Cylindrical Model as described in OET65, predicts spatially averaged MPE conditions at areas in near proximity to the antenna. In the vertical display, predicted MPE is depicted at the center of the 6 ft vertical zone that a person could occupy.

Qualifications of Waterford

With more than 100 team-years of experience, Waterford Consultants, LLC [Waterford] provides technical consulting services to clients in the radio communications and antenna locating industry. Waterford retains professional engineers who are placed in responsible charge of the processes for analysis.

Waterford is familiar with 47 C.F.R. § § 1.1307(b)(3) and 1.1310 along with the general Rules, Regulations and policies of the FCC. Waterford work processes incorporate all specifications of FCC Office of Engineering and Technology, Bulletin 65 ("OET65"), from the website: www.fcc.gov/oet/rfsafety and follow criteria detailed in 47 CFR § 1.1310 "Radiofrequency radiation exposure Limits".

Within the technical and regulatory framework detailed above, Waterford developed tools according to recognized and generally accepted good engineering practices. Permissible exposure limits are band specific, and the Waterford computerized modeling tools correctly calculate permissible exposure based on the band(s) specified in the input data. Only clients and client representatives are authorized to provide input data through the Waterford web portal. In securing that authorization, clients and client representatives attest to the accuracy of all input data.


Waterford Consultants, LLC attests to the accuracy of the engineering calculations computed by those modeling tools. Furthermore, Waterford attests that the results of those engineering calculations are correctly summarized in this report.

Antenna Inventory


#	Operator	Make	Model	Freq (MHz)	Az (deg)	Tilt (deg)	HorBW (deg)	Ant (ft)	TPO (w)	Paths	Loss (db)	Ant Gain	Radiated Power (W)	RC AGL (ft)
1	T-Mobile	AMPHENOL	6U4MT360X12F2ys0 T02 1900	1900	0	0	360	2	30	4	1.5	6.6dBd	636.830 EIRP	29
2	T-Mobile	AMPHENOL	6U4MT360X12F2ys0 T02 2100	2100	0	0	360	2	30	4	1.5	6.6dBd	636.830 EIRP	29
3	T-Mobile	AMPHENOL	6U4MT360X12F2ys0 T02 2500	2500	0	0	360	2	40	4	1.5	6.6dBd	849.110 EIRP	29
4	Verizon	AMPHENOL	6U4MT360X12F2ys0 T02 1900	1900	0	0	360	2	20	1	1.5	6.6dBd	106.140 EIRP	29
5	Verizon	AMPHENOL	6U4MT360X12F2ys0 T02 2100	2100	0	0	360	2	40	1	1.5	6.6dBd	212.280 EIRP	29

ELEVATION DETAIL

Predicted MPE depicted at the center of the 6 ft vertical zone that a person could occupy

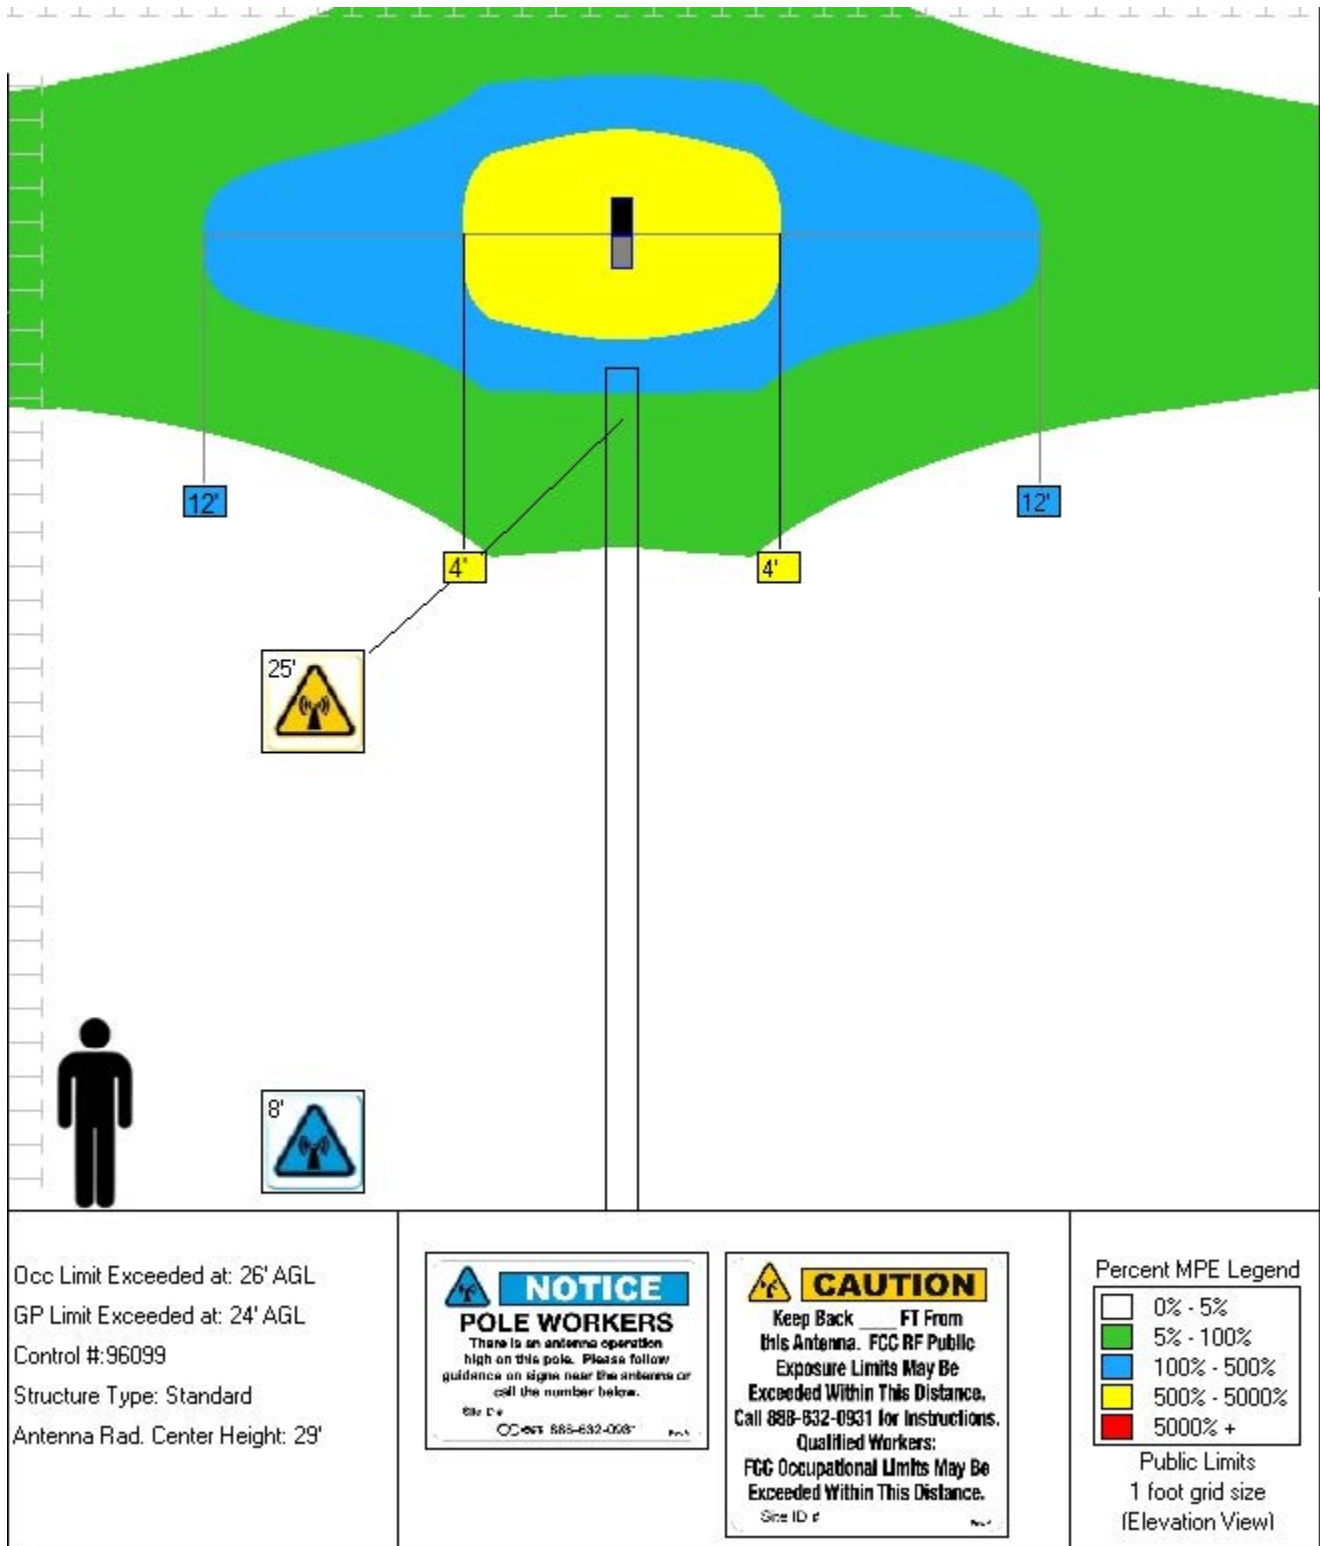

TOP DOWN DETAIL

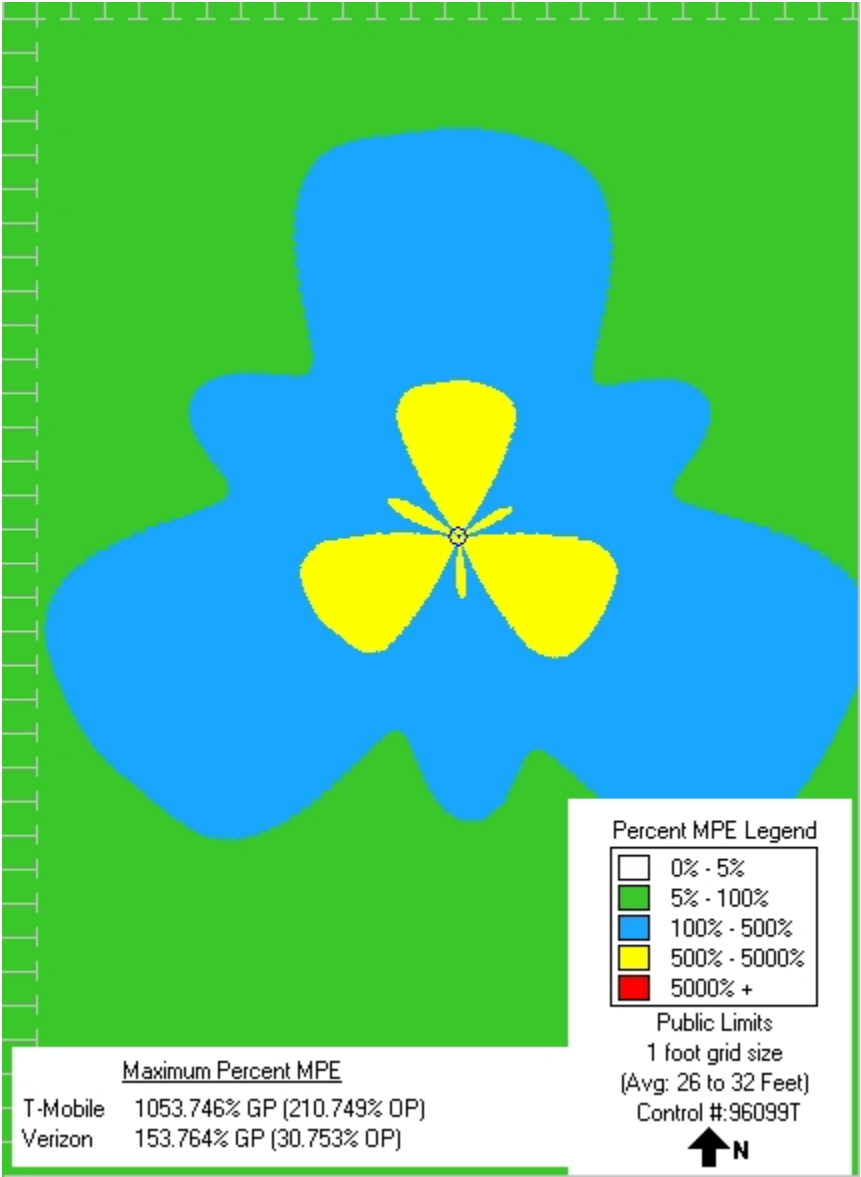

GROUND LEVEL MPE BY RF EMITTER

The maximum ground level MPE along the azimuth of orientation for each RF emitter by band of operation is listed below. The computational approach is described in the Predictive Modeling section. The maximum MPE by operator and band is contributive to the cumulative ground level MPE summary table presented above.


T-Mobile
TMO_Omni Config-01_1
AMPHENOL - 6U4MT360X12F2ys0 T02 1900 0° Sector

Maximum Exposure Limit - 1900 MHz

Limit (GP): 1000.000 $\mu\text{W}/\text{cm}^2$

EIRP	Height	Downtilt
(Watts)	(feet)	(Degrees)
636.830	29.000	0

Ground Level MPE as Percent of FCC General Population Limits

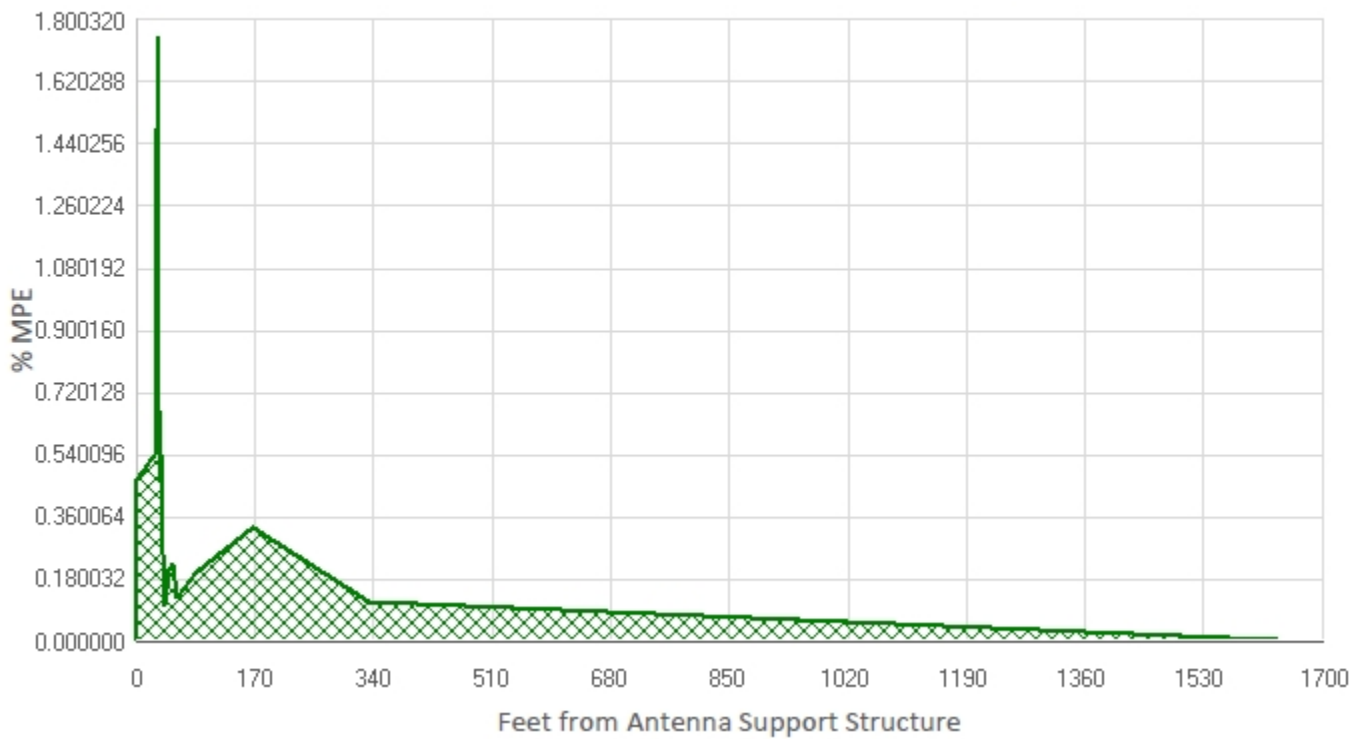

Maximum power density at ground level:

17.513 $\mu\text{W}/\text{cm}^2$

Highest percentage of Maximum Exposure Limit:

1.751 %


T-Mobile
TMO_Omni Config-01_1
AMPHENOL - 6U4MT360X12F2ys0 T02 2100 0° Sector

Maximum Exposure Limit - 2100 MHz

Limit (GP): 1000.000 $\mu\text{W}/\text{cm}^2$

EIRP	Height	Downtilt
(Watts)	(feet)	(Degrees)
636.830	29.000	0

Ground Level MPE as Percent of FCC General Population Limits

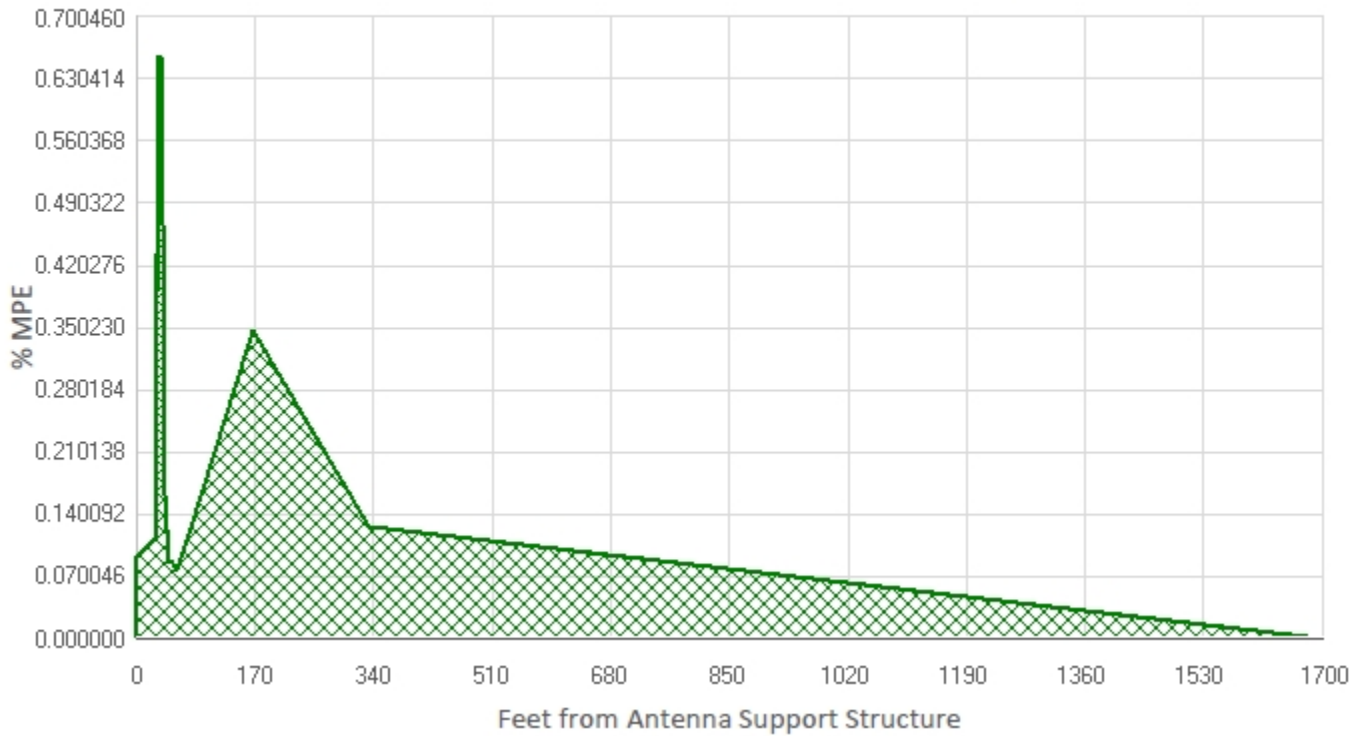

Maximum power density at ground level:

6.585 $\mu\text{W}/\text{cm}^2$

Highest percentage of Maximum Exposure Limit:

0.658 %


T-Mobile
TMO_Omni Config-01_1
AMPHENOL - 6U4MT360X12F2ys0 T02 2500 0° Sector

Maximum Exposure Limit - 2500 MHz

Limit (GP): 1000.000 $\mu\text{W}/\text{cm}^2$

EIRP	Height	Downtilt
(Watts)	(feet)	(Degrees)
849.110	29.000	0

Ground Level MPE as Percent of FCC General Population Limits

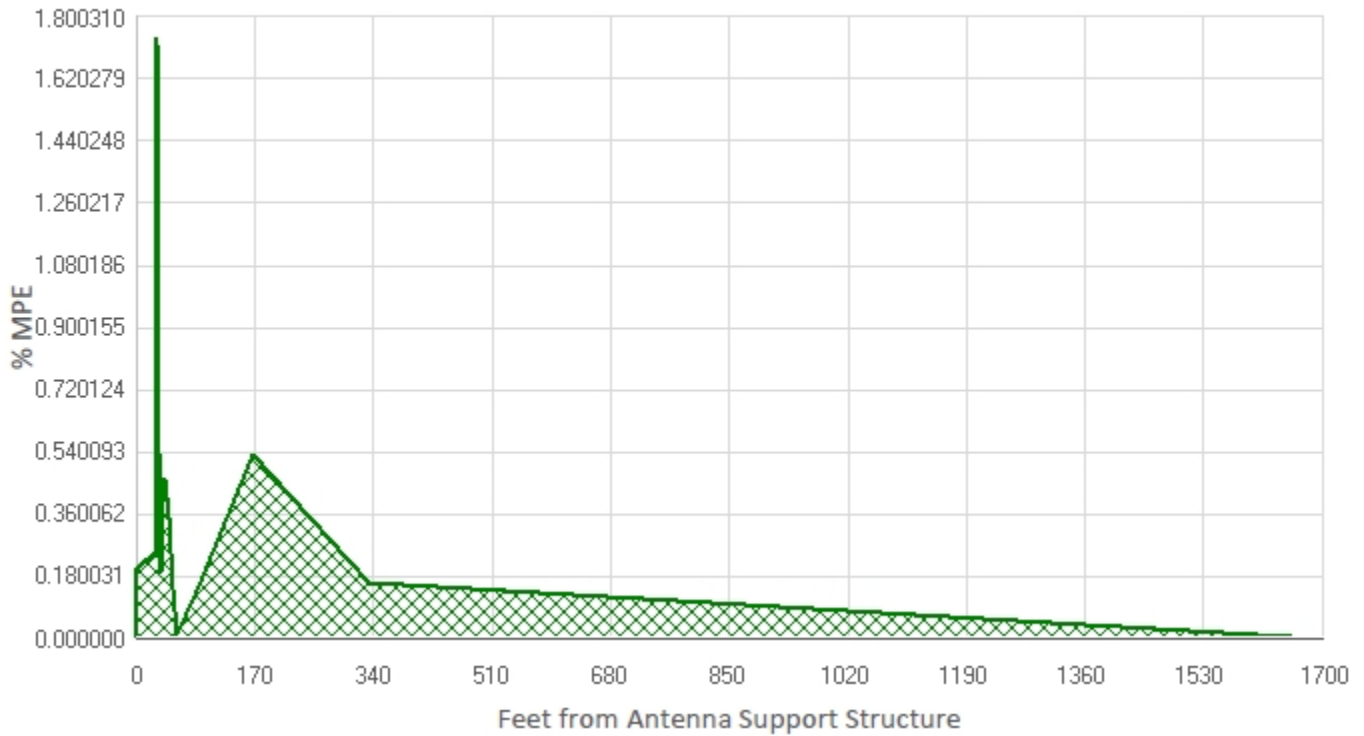

Maximum power density at ground level:

17.403 $\mu\text{W}/\text{cm}^2$

Highest percentage of Maximum Exposure Limit:

1.740 %


Verizon
TMO_Omni Config-01_1
AMPHENOL - 6U4MT360X12F2ys0 T02 1900 0° Sector

Maximum Exposure Limit - 1900 MHz

Limit (GP): 1000.000 $\mu\text{W}/\text{cm}^2$

EIRP		Height		Downtilt	
(Watts)	106.140	(feet)	29.000	(Degrees)	0

Ground Level MPE as Percent of FCC General Population Limits

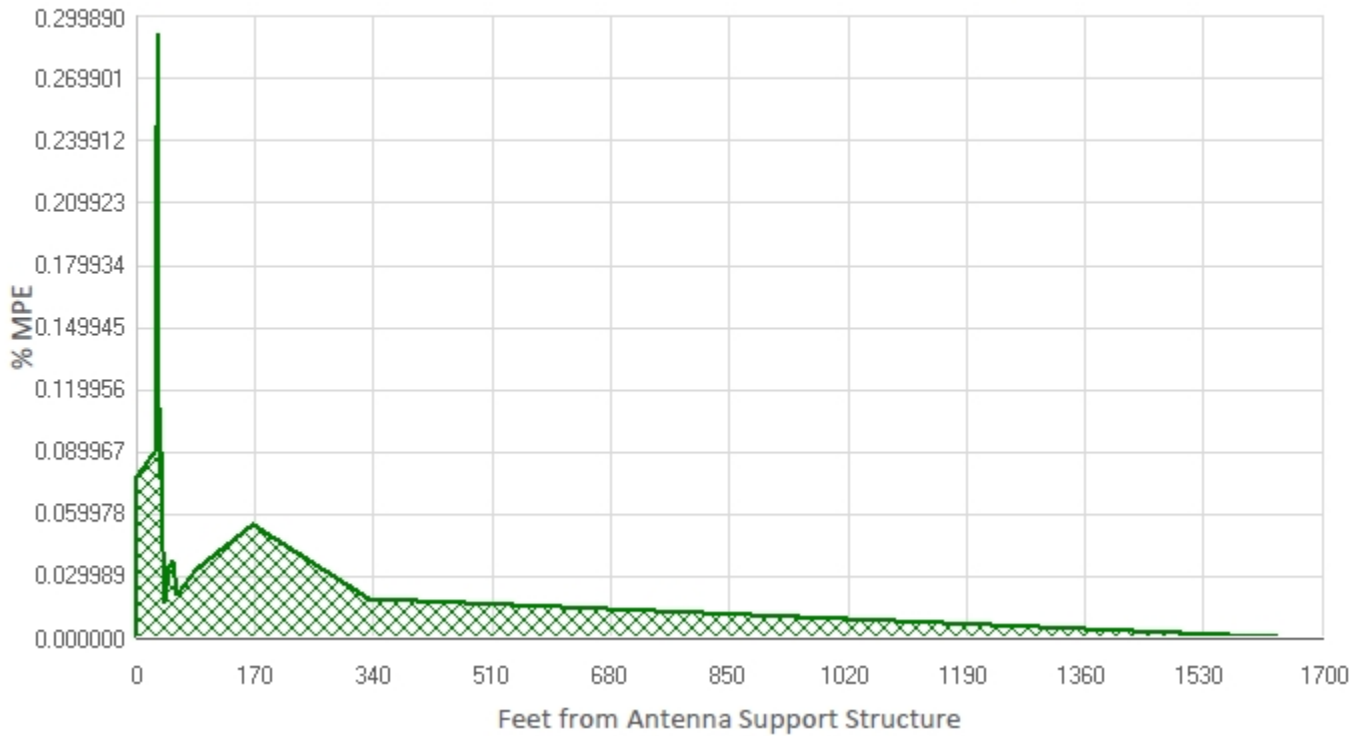

Maximum power density at ground level:	2.919 $\mu\text{W}/\text{cm}^2$
Highest percentage of Maximum Exposure Limit:	0.292 %


Verizon
TMO_Omni Config-01_1
AMPHENOL - 6U4MT360X12F2ys0 T02 2100 0° Sector

Maximum Exposure Limit - 2100 MHz

Limit (GP): 1000.000 $\mu\text{W}/\text{cm}^2$

EIRP	Height	Downtilt
(Watts)	(feet)	(Degrees)
212.280	29.000	0

Ground Level MPE as Percent of FCC General Population Limits

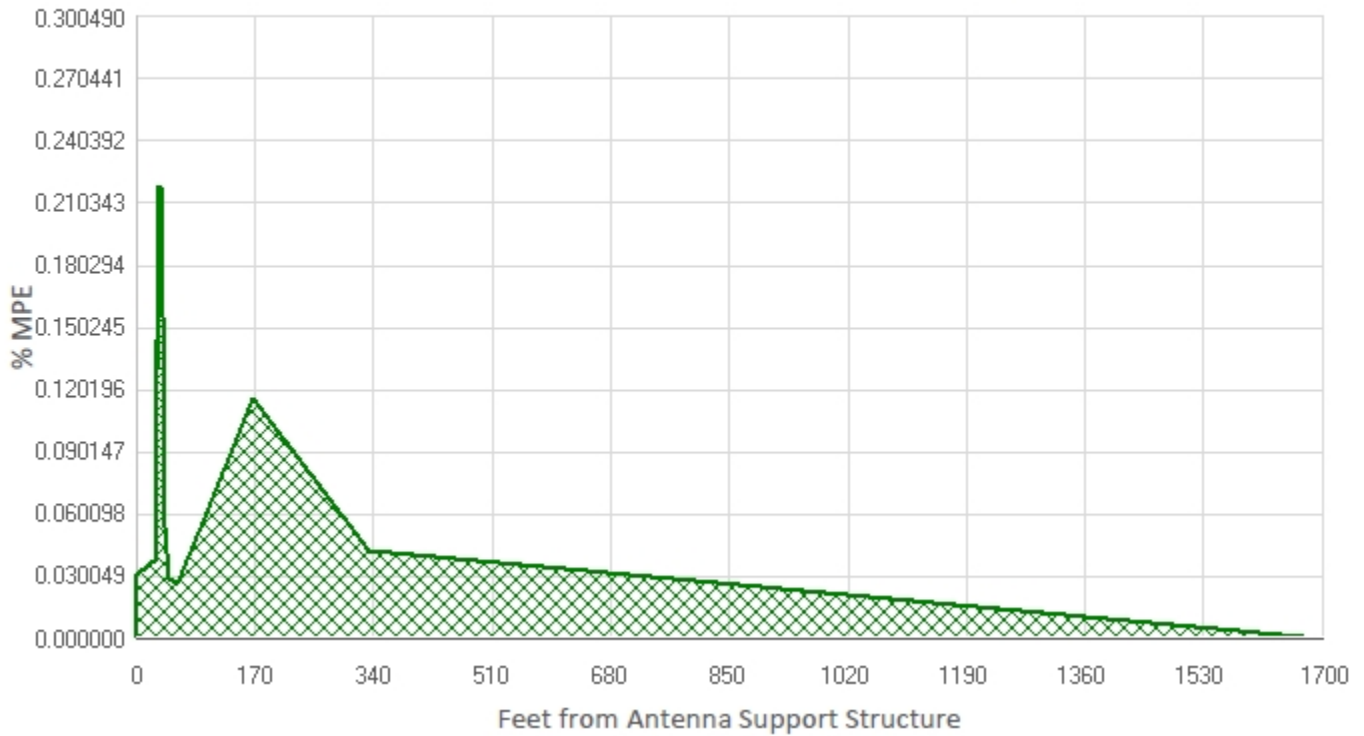

Maximum power density at ground level:

2.195 $\mu\text{W}/\text{cm}^2$

Highest percentage of Maximum Exposure Limit:

0.219 %